



AMPAG SPEED TRANSIT

STRAPPING MACHINE

CYKLOP[®]
GLOBAL PACKAGING SOLUTIONS

STRAPPING
WRAPPING
CODING
TAPING


The fully automatic strapping machine Ampag Speed TR has been specially developed for strapping at high speed. The strapping machine can make up to 65 straps per minute. The machine is easy to integrate into fully automatic production lines. The strap tension of the Ampag Speed TR is adjustable, the machine has a sensor driven welding system (by means of the eye in the worktop) and the conveyor belt speed is adjustable. The wheels make the machine easy to move.

Advantages:

- Up to 65 straps per minute
- Strap tension adjustable
- Mis-straps are automatically ejected
- Strap end sensor with automatic ejection and feed
- Conveyor belt speed is infinitely adjustable
- Wide transport for narrow, light products

Options:

- Stainless steel version
- Conveyor belts
- Siemens touch panel
- Communication plug

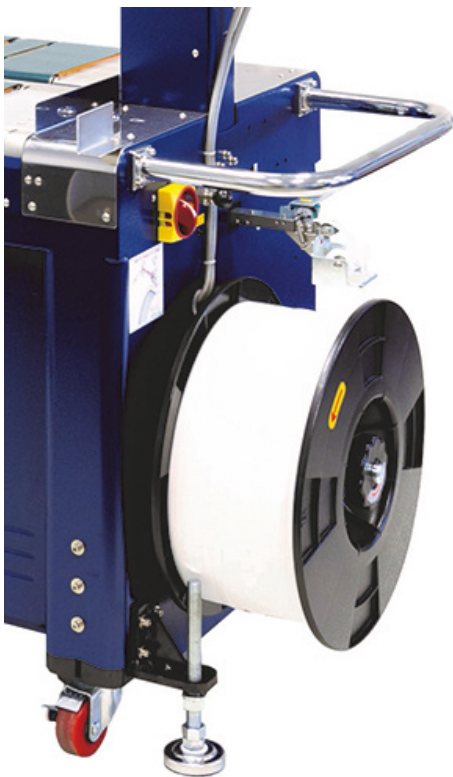

Technical data	
Speed	Up to 65 straps/minute
Consumable	PP strap: 5, 9 or 12 mm
Package dimensions (W x H)	Min. 120 x 10 mm Max. 600 x 450 mm
Package weight	Max. 35 kg
Strap coil	Core 200 mm Outer diameter 420 mm Width 190 mm
Strap tension	Infinitely adjustable up to 450 N
Strapping	Heat seal
Table height	800 - 900 mm
Warm up time	25 seconds
Transport speed	10 - 60 m/min
Weight	225 kg
Power supply	230 V, 1 phase, 50 Hz

Cyklop International
 Industriestraße 133, D-50996 Köln
 (Rodenkirchen)
 Postfach / P.O. Box 50 12 20,
 D-50972 Köln (Rodenkirchen)

+49 (0) 2236 6020
www.cyklop.com
info@cyklop.com